

FIG. 1

ARRANGEMENT OF SYSTEM CONNECTOR PIN

PIN NUMBER	NAME	SIGNAL TRANSMISSION DIRECTION		REMARKS
		MOBILE COMMUNICATION TERMINAL	EXTERNAL DEVICE	
P1	GND(USBGND)	—	—	CONFORMS TO USB STANDARD 1.1
P2	USB D+	↔	↔	CONFORMS TO USB STANDARD 1.1
P3	USB D-	↔	↔	CONFORMS TO USB STANDARD 1.1
P4	USB VBUS	↔	↔	CONFORMS TO USB STANDARD 1.1
P5	CHARGING POWER SOURCE INPUT PIN	↔	↔	FOR USE IN CHARGING
P6	CHARGING POWER SOURCE INPUT PIN	↔	↔	FOR USE IN CHARGING
P7	SYNCHRONIZING CLOCK OUTPUT PIN	→	→	FOR SYNCHRONIZING CLOCK OUTPUT
P8	MAKER'S OPTION PIN	↔	↔	FOR MAKER'S OPTION
P9	RESERVATION PIN	NOT CONNECTED	NOT CONNECTED	FOR RESERVATION
P10	GND	—	—	GRAND
PRF	RF TRX	↔	↔	FOR COAXIAL (EXTERNAL ANTENNA) CONNECTION

FIG. 2

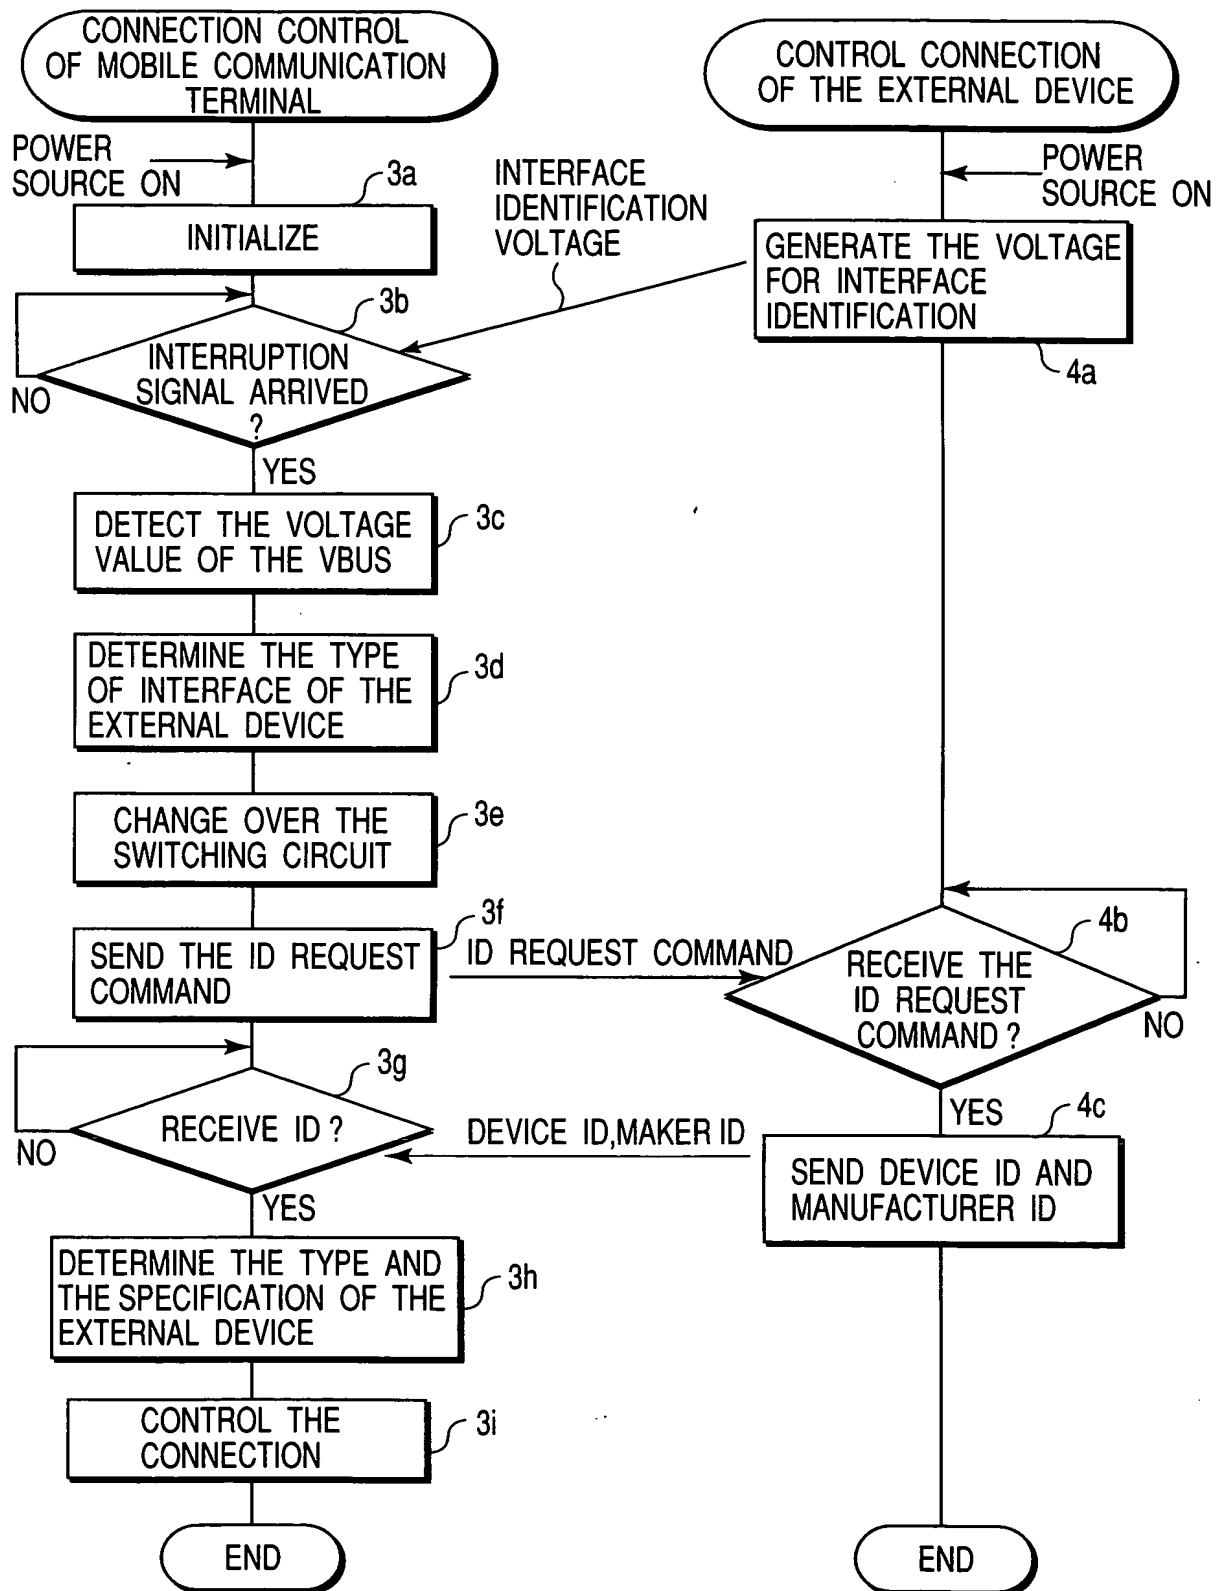


FIG. 3

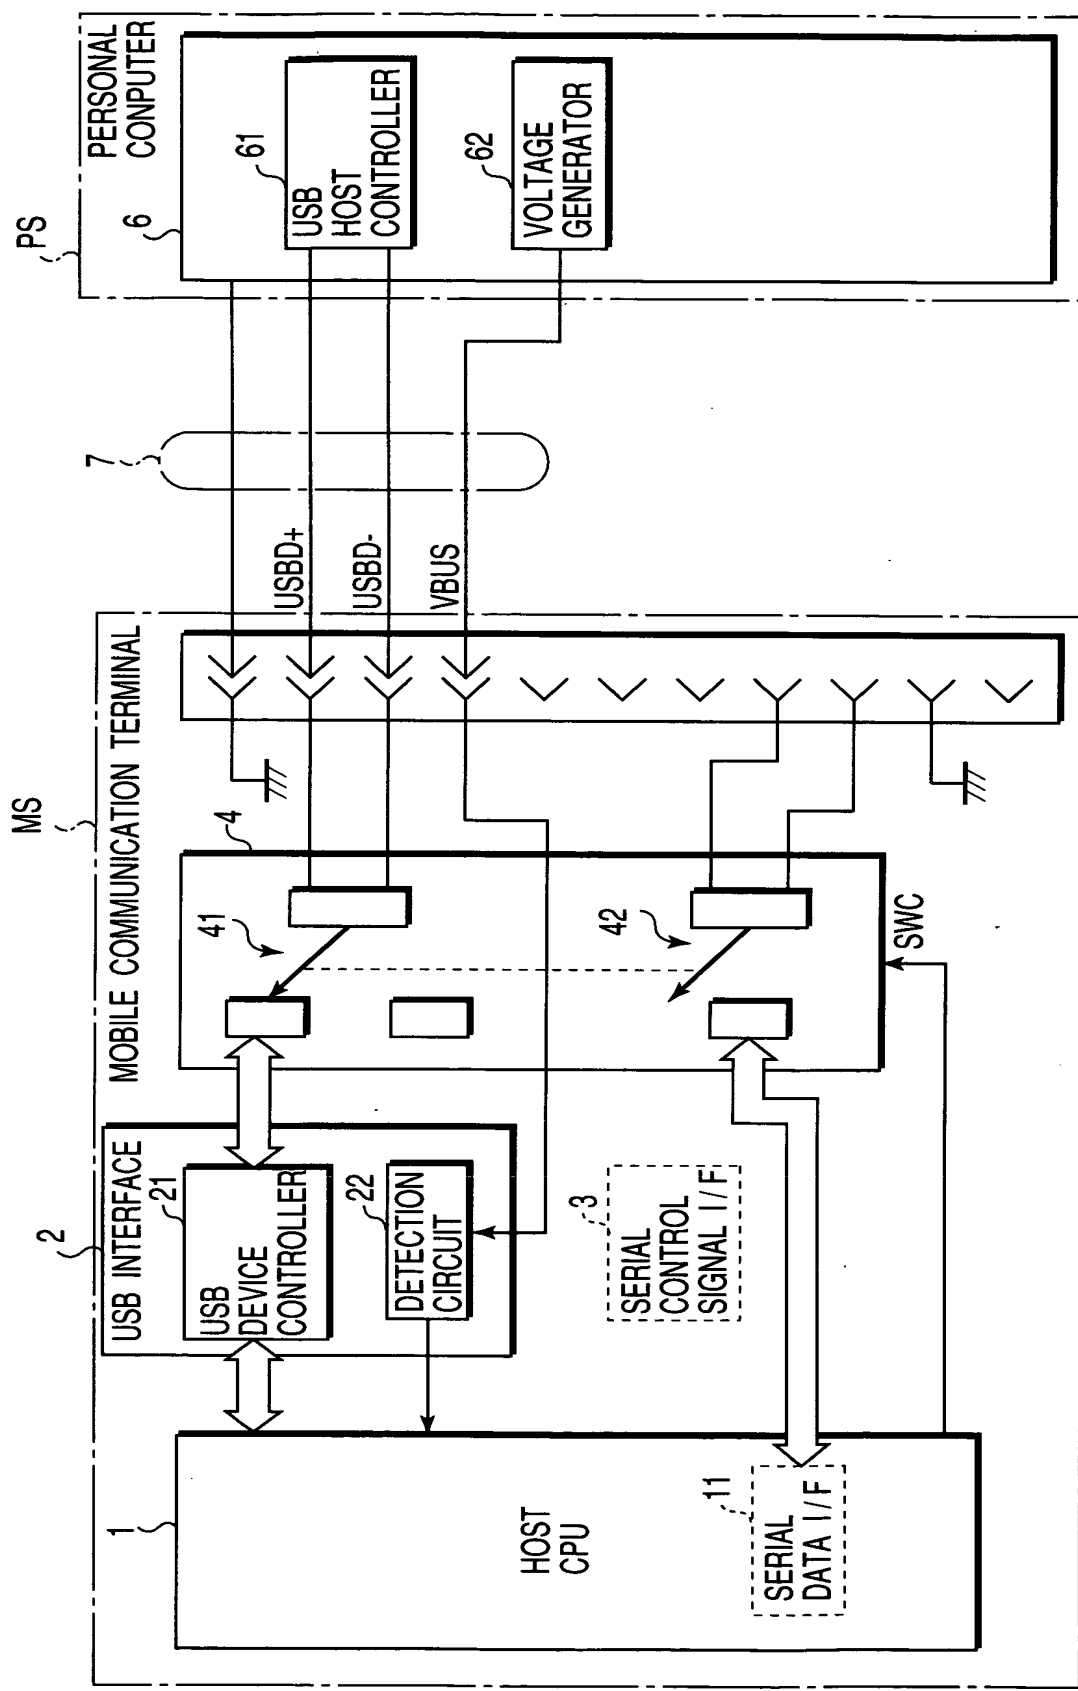


FIG. 4

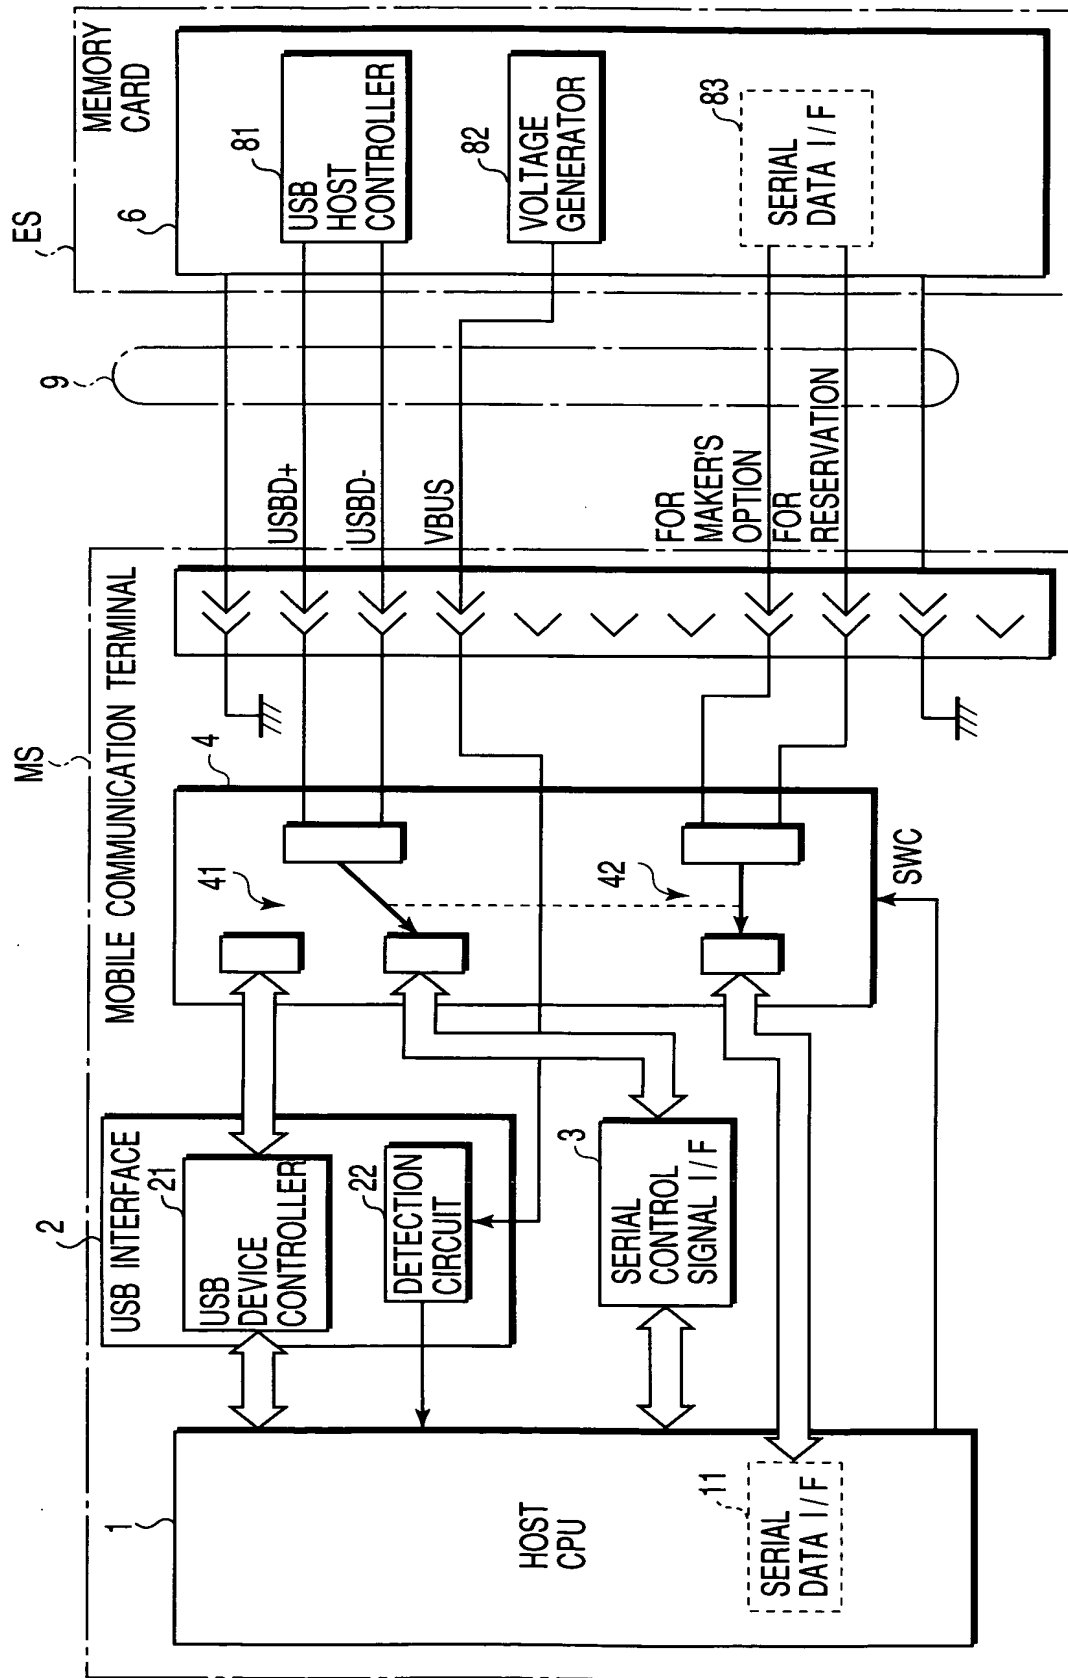


FIG. 5